


Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20



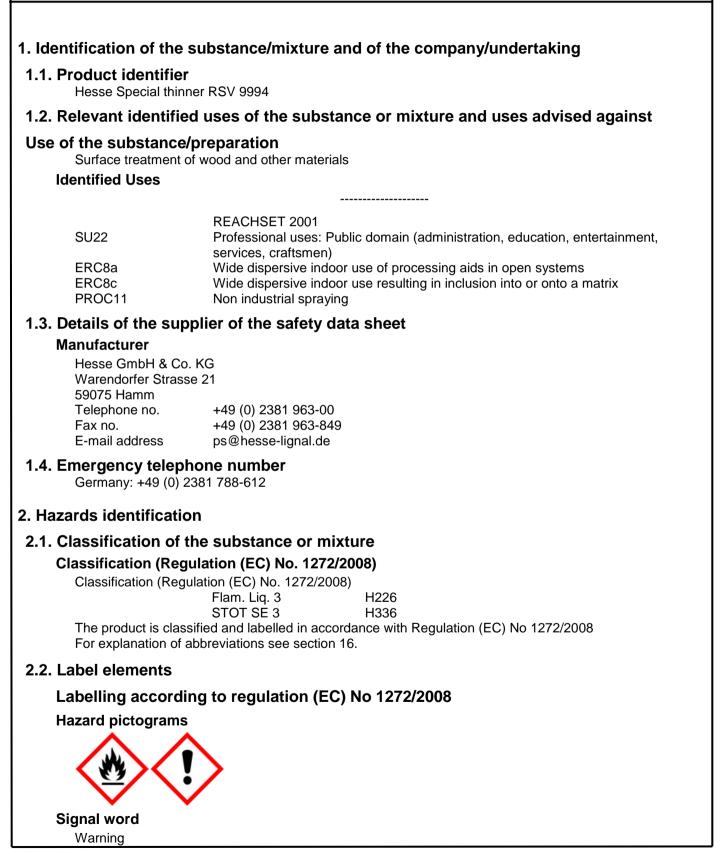

Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

H226 H336	Flammable liquid and va May cause drowsiness o		
Precautionary state	•	n uizziness.	
P210		nt surfaces so	arks, open flames and other ignition
1210	sources. No smoking.		
P261 P280	Avoid breathing dust/fun		
P304+P340			ing/eye protection/face protection. air and keep comfortable for breathing.
P308+P313	IF exposed or concerned	d: Get medical	advice/ attention.
P403+P233	Store in a well-ventilated		
-	.,		llation (EC) No. 1272/2008)
contains	2-ethoxy-1-methylethyl a	acetate; n-buty	acetate
Supplemental infor EUH066		, aquaa akin dr	unada ar aradking
B. Other hazards	Repeated exposure may	cause skin ur	yness of cracking.
composition/inform	ation on ingredients		
Hazardous ingredie	•		
Hazardous ingredie 2-ethoxy-1-methyle	ents		
Hazardous ingredie 2-ethoxy-1-methyle CAS No.	ents thyl acetate 54839-24-6		
Hazardous ingredie 2-ethoxy-1-methyle	ents thyl acetate		
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50		%
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008)	H226	%
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50	H226 H336	% Nervous system
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration Classification (Reg	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3		
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration Classification (Reg n-butyl acetate CAS No.	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3 123-86-4		
Hazardous ingredie 2-ethoxy-1-methyle CAS No. EINECS no. Registration no. Concentration Classification (Reg	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3		
Hazardous ingredie 2-ethoxy-1-methyler CAS No. EINECS no. Registration no. Concentration Classification (Reg n-butyl acetate CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3 123-86-4 204-658-1 01-2119485493-29 >= 50		
Hazardous ingredie 2-ethoxy-1-methyler CAS No. EINECS no. Registration no. Concentration Classification (Reg n-butyl acetate CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3 123-86-4 204-658-1 01-2119485493-29 >= 50 ulation (EC) No. 1272/2008)	H336	Nervous system
Hazardous ingredie 2-ethoxy-1-methyler CAS No. EINECS no. Registration no. Concentration Classification (Reg n-butyl acetate CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3 123-86-4 204-658-1 01-2119485493-29 >= 50		Nervous system
Hazardous ingredie 2-ethoxy-1-methyler CAS No. EINECS no. Registration no. Concentration Classification (Reg n-butyl acetate CAS No. EINECS no. Registration no. Concentration	ents thyl acetate 54839-24-6 259-370-9 01-2119475116-39 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3 STOT SE 3 123-86-4 204-658-1 01-2119485493-29 >= 50 ulation (EC) No. 1272/2008) Flam. Liq. 3	H336 H226 H336	Nervous system %

4.1. Description of first aid measures



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

General information

In all cases of doubt, or when symptoms persist, seek medical attention. If unconscious place in recovery position and seek medical advice. First aider: Pay attention to self-protection! Remove affected person from danger area, lay him down.

After inhalation

In case of accident by inhalation: remove casualty to fresh air and keep at rest. Keep warm, calm and covered up. In all cases of doubt, or when symptoms persist, seek medical attention.

After skin contact

Wash off immediately with soap and water. Do NOT use solvents or thinners. Consult a doctor if skin irritation persists.

After eye contact

Remove contact lenses, irrigate copiously with clean, fresh water, holding the eyelids apart for at least 10 minutes and seek immediate medical advice. Take medical treatment.

After ingestion

Do not induce vomiting. Take medical treatment.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness. High concentration of vapours may cause irritation to eyes and respiratory system and produce narcotic effects.

4.3. Indication of any immediate medical attention and special treatment needed

Hints for the physician / treatment

Treat symptomatically.

5. Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media

Recommended: alcohol resistant foam, CO2, powders, water spray/mist

Non suitable extinguishing media

Do not use a solid water stream as it may scatter and spread fire.

5.2. Special hazards arising from the substance or mixture

Fire will produce dense black smoke. In a fire, hazardous decomposition products may be produced. Exposure to decomposition products may cause a health hazard. Vapours can form an explosive mixture with air.

5.3. Advice for firefighters

Special protective equipment for fire-fighting

In case of combustion evolution of dangerous gases possible. Use self-contained breathing apparatus.

Other information

Do not allow run-off from fire fighting to enter drains or water courses. Cool closed containers exposed to fire with water. Standard procedure for chemical fires.

6. Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

Eliminate all ignition sources if safe to do so. Ensure adequate ventilation. Do not inhale vapours. Do not



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

inhale gases. Do not inhale mist.

6.2. Environmental precautions

Do not allow to enter drains or waterways. Do not allow to enter soil, waterways or waste water canal. In case of gas escape or of entry into waterways, soil or drains, inform the responsible authorities.

6.3. Methods and material for containment and cleaning up

Contain and collect spillage with non-combustible absorbent materials, e.g. sand, earth, vermiculite, diatomaceous earth and place in container for disposal according to local regulations (see section 13). Clean contaminated floors and objects thoroughly with water and detergents, observing environmental regulations. Do NOT use solvents or thinners. Send in suitable containers for recovery or disposal.

6.4. Reference to other sections

Refer to protective measures listed in Sections 7 and 8.

7. Handling and storage

7.1. Precautions for safe handling

Advice on safe handling

Prevent the creation of flammable or explosive concentrations of vapour in air and avoid vapour concentration higher than the occupational exposure limits. Keep container tightly closed and dry in a cool, well-ventilated place. Use only with adequate ventilation/personal protection. Ensure adequate ventilation. Provide for sufficient ventilation. This can be achieved by local exhaust or general exhaust air collection. Wear a suitable respirator if the ventilation is not sufficient to keep the solvent vapour concentration below the occupational limit values. Avoid contact with skin and eyes. Avoid inhalation of vapour and spray mist. Do no eat, drink or smoke when using this product. Use personal protective clothing. For personal protection see Section 8.

Advice on protection against fire and explosion

Vapours can form an explosive mixture with air. Vapours are heavier than air and may spread along floors. In addition, the product should only be used in areas from which all naked lights and other sources of ignition have been excluded. Mixture may charge electrostatically: always use earthing leads when transferring from one container to another. Take measures to prevent the build up of electrostatic charge. Wear shoes with conductive soles. No sparking tools should be used. Fight fire with normal precautions from a reasonable distance.

7.2. Conditions for safe storage, including any incompatibilities

Requirements for storage rooms and vessels

Provide solvent-resistant and impermeable floor. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Hints on storage assembly

Store away from oxidising agents, from strongly alkaline and strongly acid materials.

Further information on storage conditions

Keep away from heat. Protect from sunlight. Keep away from sources of ignition - No smoking. Store in accordance with the particular national regulations.

7.3. Specific end use(s)

See exposure scenario, if available.

8. Exposure controls/personal protection

8.1. Control parameters



Trade name: Hesse Special thinner RSV 9994 Version: 10 / GB Revision: 06.08.2020 Replaces Version: 9 / GB Print date: 17.09.20 **Exposure limit values** n-butyl acetate List EH40 724 Value 150 ppm(V)mg/m³ Short term exposure limit 966 mg/m³ 200 ppm(V)Status: 01/2020 n-butyl acetate List Directive 2017/164 EG Value 241 mg/m³ 50 ppm(V)Short term exposure limit 723 mg/m³ 150 ppm(V) Status: 10/2019 Other information Derived No/Minimal Effect Levels (DNEL/DMEL) n-butyl acetate Type of value Derived No Effect Level (DNEL) Reference group Workers (professional) Duration of exposure Long-term Route of exposure Dermal exposure Systemic effects Mode of action Concentration 11 mg/kg/d Type of value Derived No Effect Level (DNEL) Reference group Workers (professional) Duration of exposure Short-term Route of exposure inhalative Mode of action Systemic effects Concentration 600 mg/m³ Type of value Derived No Effect Level (DNEL) Reference group Workers (professional) Short-term Duration of exposure Route of exposure inhalative Mode of action Local effects 600 mg/m³ Concentration Type of value Derived No Effect Level (DNEL) Reference group Workers (professional) Duration of exposure Long-term Route of exposure inhalative Mode of action Local effects Concentration 300 mg/m³ Type of value Derived No Effect Level (DNEL) Reference group Workers (professional) Duration of exposure Long-term Route of exposure inhalative Mode of action Systemic effects Concentration 300 mg/m³ Derived No Effect Level (DNEL) Type of value



	10004	
Trade name: Hesse Special thinner RS	/ 9994	
Version: 10 / GB		Revision: 06.08.2020
Replaces Version: 9 / GB		Print date: 17.09.20
Poforonoo group	Consumer	
Reference group Duration of exposure	Long-term	
Route of exposure	Dermal exposure	
Mode of action	Systemic effects	
Concentration	6	mg/kg/d
Concentration	C C	mg, kg, k
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	Oral exposure	
Mode of action	Systemic effects	
Concentration	2	mg/kg/d
Type of value	Derived No Effect Level (DNEL)	
Reference group	Derived No Effect Level (DNEL) Consumer	
Duration of exposure	Short-term	
Route of exposure	inhalative	
Mode of action	Systemic effects	
Concentration	300	mg/m³
Concentration	000	mg/m
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Short-term	
Route of exposure	inhalative	
Mode of action	Local effects	
Concentration	300	mg/m³
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	inhalative	
Mode of action	Systemic effects	
Concentration	35,7	mg/m³
		3
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	inhalative	
Mode of action	Local effects	
Concentration	35,7	mg/m³
2-ethoxy-1-methylethyl acetate Type of value	Derived No Effect Level (DNEL)	
Reference group	Workers (professional)	
Duration of exposure	Short-term	
Route of exposure	inhalative	
Mode of action	Systemic effects	
Concentration	608	mg/m³
		č
Type of value	Derived No Effect Level (DNEL)	
Reference group	Workers (professional)	
Duration of exposure	Long-term	
Route of exposure	Dermal exposure	



Trade name: Hesse Special thinner RSV 9994

Version: 10 / GB Replaces Version: 9 / GB Revision: 06.08.2020 Print date: 17.09.20

Made of estima	Sustamia offasta	
Mode of action	Systemic effects	
Concentration	103	mg/kg/d
Type of value	Derived No Effect Level (DNEL)	
Reference group	Workers (professional)	
Duration of exposure	Long-term	
	inhalative	
Route of exposure		
Mode of action	Systemic effects	
Concentration	302	mg/m³
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Short-term	
Route of exposure	inhalative	
Mode of action	Systemic effects	
Concentration	365	mg/m³
Concentration	303	mg/m
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	Dermal exposure	
Mode of action	Systemic effects	
Concentration	62	mg/kg/d
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	inhalative	
Mode of action	Systemic effects	
Concentration	181	mg/m³
Turne of unlive		
Type of value	Derived No Effect Level (DNEL)	
Reference group	Consumer	
Duration of exposure	Long-term	
Route of exposure	Oral exposure	
Mode of action	Systemic effects	
Concentration	13,1	mg/kg/d
Predicted No Effect Conc	entration (PNEC)	
n-butyl acetate		
Type of value	PNEC	
Type	Freshwater	
Concentration	0,18	mg/l
Concontration	0,10	
Type of value	PNEC	
Туре	Saltwater	
Concentration	0,018	mg/l
Concentration		
	PNEC	
Type of value	PNEC Sewage treatment plant (STP)	
	PNEC Sewage treatment plant (STP) 35,6	mg/l



Trade name: Hesse Special thinner RSV 9994

Version: 10 / GB Replaces Version: 9 / GB Revision: 06.08.2020 Print date: 17.09.20

Type of value	PNEC	
Туре	Water	
Conditions	sporadic release	
Concentration	0,36	mg/l
Type of value	PNEC	
Туре	Fresh water sediment	
Concentration	0,981	mg/kg
Type of value	PNEC	
Туре	saltwater sediment	
Concentration	0,0981	mg/l
Type of value	PNEC	
Туре	Soil	
Concentration	0,0903	mg/kg
		0.0
2-ethoxy-1-methylethyl acetate		
Type of value	PNEC	
Туре	Freshwater	
Concentration	1,3	mg/l
Type of value	PNEC	
Туре	Saltwater	
Concentration	0,13	mg/l
Type of value	PNEC	
Туре	Fresh water sediment	
Concentration	6,4	mg/kg
Type of value	PNEC	
Туре	saltwater sediment	
Concentration	0,64	mg/kg
Type of value	PNEC	
Туре	Soil	
Concentration	1,34	mg/kg
Type of value	PNEC	
Туре	Sewage treatment plant (STP)	
Concentration	62,5	mg/l
		5

8.2. Exposure controls

Exposure controls

Users are advised to consider national Occupational Exposure Limits or other equivalent values. Provide for sufficient ventilation. This can be achieved by local exhaust or general exhaust air collection. Wear a suitable respirator if the ventilation is not sufficient to keep the solvent vapour concentration below the occupational limit values.

Respiratory protection

Avoid inhalation of vapour and spray mist. Use breathing apparatus if exposed to vapours/dust/aerosol. Recommended Filter type: Respiratory protection mask with combination filter A/P2



Trade name: Hesse Special thinner RSV 9994

Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

Hand protection

Protective gloves complying with EN 374. Glove material

Glove material			
Appropriate Material	butyl	-rubber	
Material thickness	>=	0,7	mm
Breakthrough time	>=	30	min
This as a survey and start in the shalls	ن با مر ما	6	

This recommendation is valid only for the product named in this safety data sheet supplied by us, and only for the indicated intended use purposes.

For special purposes, it is recommended to check the resistance to chemicals of the protective gloves mentioned above together with the supplier of these gloves.

The instructions and information provided by the glove manufacturer on use, storage, maintenance and replacement must be followed.

The breakthrough time must be greater than the end use time of the product.

Gloves should be replaced regularly and if there is any sign of damage to the glove material.

The performance or effectiveness of the glove may be reduced by physical/ chemical damage and poor maintenance.

Eye protection

Wear eye glasses with side protection according to EN 166.

Body protection

Wear suitable protective clothing. Remove contaminated clothing and wash it before reuse. Wash hands before breaks and after work.

9. Physical and chemical properties

9.1. Information on basic physical and chemical properties

Form	liquid	•	•	
Colour	colourless			
Odour	solvent-like			
Odour threshold				
Remarks	not determined			
pH value				
Remarks	not determined			
Melting point				
Remarks	not determined			
Freezing point				
Remarks	not determined			
Initial boiling point and boil	ing range			
Value	124	to	160	°C
Flash point				
Value	33,0			°C
Evaporation rate				
Remarks	not determined			
Flammability (solid, gas)				
not determined				
Upper/lower flammability or	r explosive limits			
Remarks	not determined			



Trade name: Hesse Special thinner RSV 9994 Version: 10 / GB Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

Vapour pressure					
Remarks	not determined				
Vapour density					
Remarks	not det	ermined			
Density					
Value	appr.	0,907	°C		kg/l
Temperature		20	C		
Solubility in water Remarks	not dot	ermined			
	not det	emmeu			
Solubility(ies) Remarks	not det	ermined			
Partition coefficient: n-octano					
Remarks		ermined			
Ignition temperature	not det	ermineu			
Remarks	not det	ermined			
Decomposition temperature	not do	omnou			
Remarks	not det	ermined			
Viscosity					
Remarks	not det	ermined			
Efflux time					
Value		20	to	48	S
Temperature		20	°C		
Method	DIN EN	N ISO 2431	- 3 mm		
Explosive properties					
evaluation	not det	ermined			
Oxidising properties					
Remarks	not det	ermined			
9.2. Other information					
Non-volatile content					
Value Matheori		0			%
Method Other information	calcula	ted value			
This information is not available					
10 Stability and reactivity					
10. Stability and reactivity					
10.1. Reactivity Stable under recommended stor	rage and	d handling c	condition	s (see sect	ion 7).
10.2. Chemical stability Stable under normal conditions.					
10.3. Possibility of hazardous r o avoid thermal decomposition					
10.4. Conditions to avoid	, • • •				



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

Isolate from sources of heat, sparks and open flame.

10.5. Incompatible materials

Keep away from oxidising agents, strongly alkaline and strongly acid materials in order to avoid exothermic reactions.

10.6. Hazardous decomposition products

Carbon monoxide and carbon dioxide, nitrous oxides (NOx), dense black smoke, No decomposition if used as prescribed.

11. Toxicological information

11.1. Information on toxicological effects

Acute oral toxicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Acute dermal toxicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Acute inhalational toxicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Skin corrosion/irritation	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Serious eye damage/irritat	ion
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Sensitization	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Mutagenicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Reproductive toxicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Carcinogenicity	
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) Based on available data, the classification criteria are not met.
Specific Target Organ Tox	icity (STOT)
Method Remarks	Calculation method (Regulation (EC) No. 1272/2008) The classification criteria are met.
Aspiration hazard	
Based on available data, the	e classification criteria are not met.
Other information	
No toxicological data are ava	ailable.



Trade name: Hesse Special thinner RSV 9994 Version: 10 / GB Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

12. Ecological information

12.1. Toxicity

General information

For this subsection there is no ecotoxicological data available on the product as such.

12.2. Persistence and degradability

General information

For this subsection there is no ecotoxicological data available on the product as such.

12.3. Bioaccumulative potential

General information

For this subsection there is no ecotoxicological data available on the product as such.

Partition coefficient: n-octanol/water

Remarks

not determined

12.4. Mobility in soil

General information

For this subsection there is no ecotoxicological data available on the product as such.

Mobility in soil

no data available

12.5. Results of PBT and vPvB assessment

General information

For this subsection there is no ecotoxicological data available on the product as such.

12.6. Other adverse effects

General information

For this subsection there is no ecotoxicological data available on the product as such.

General information / ecology

For this subsection there is no ecotoxicological data available on the product as such.

13. Disposal considerations

13.1. Waste treatment methods

Disposal recommendations for the product

EWC waste code140603 - other solvents and solvent mixturesEWC waste code200113 - solventsWhere possible recycling is preferred to disposal or incineration.Do not allow to enter drains or waterways.Where possible recycling is preferred to disposal or incineration.Do not allow to enter drains or waterways.Where possible recycling is preferred to disposal or incineration.Do not allow to enter drains or waterways.

modified product

EWC waste code

070304 - other organic solvents, washing liquids and mother liquors

Disposal recommendations for packaging

EWC waste code

150110 - packaging containing residues of or contaminated



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

by dangerous substances Completely emptied packagings can be given for recycling. Completely emptied packagings can be given for recycling.

14. Transport information

	Land transport ADR/RID	Marine transport IMDG/GGVSee	Air transport ICAO/IATA
Tunnel restriction code	D/E		
14.1. UN number	1263	1263	1263
14.2. UN proper shipping name	PAINT RELATED MATERIAL	PAINT RELATED MATERIAL	PAINT RELATED MATERIAL
14.3. Transport hazard class(es)	3	3	3
Label		*	*
14.4. Packing group	III	Ш	III
Limited Quantity	51		
Transport category	3		

15. Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

or mixture				
VOC				
VOC (EU)	100	%	907	g/l
Other information				
All components are contained	in the TSCA inv	entory o	r exempte	d.
15.2. Chemical safety assessingFor this substance / mixture a16. Other information		assessr	nent was r	not carried out.
Hazard statements listed in	Chapter 3			
H226	Repeated expos Flammable liqui May cause drov	d and va	pour.	n dryness or cracking. s.
CLP categories listed in Cha	pter 3			
	Flammable liqui Specific target c			le exposure, Category 3



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020

Print date: 17.09.20

Abbreviations

ADR - Accord européen sur le transport des marchandises dangereuses par Route (European Agreement concerning the International Carriage of Dangerous Goods by Road) RID - Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations Concerning theInternational Transport of Dangerous Goods by Rail) IMDG - International Maritime Code for Dangerous Goods IATA - International Air Transport Association IATA-DGR - Dangerous Goods Regulations by the "International Air Transport Association" (IATA) ICAO-TI - Technical Instructions by the "International Civil Aviation Organization" (ICAO) GHS - Globally Harmonized System of Classification and Labelling of Chemicals EINECS - European Inventory of Existing Commercial Chemical Substances CAS - Chemical Abstracts Service (division of the American Chemical Society) GefStoffV - Gefahrstoffverordnung (Ordinance on Hazardous Substances, Germany) LOAEL - Lowest Observed Adverse Effect Level LOEL - Lowest Observed Effect Level NOAEL - No Observed Adverse Effect Level NOEC - No Observed Effect Concentration NOEL - No Observed Effect Level OECD - Organisation for Econpmic Cooperation and Development VOC - Volatile Organic Compounds Changes since the last version are highlighted in the margin (***). This version replaces all previous versions. This safety datasheet only contains information relating to safety and does not replace any product information or product specification. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. The information contained herein is based on the present state of our knowledge and does therefore not guarantee certain properties.

Annex to the extended Safety Data Sheet (eSDS)

Short title of the exposure scenario

ES007 - Professional uses: Non industrial spraying (inside)

Use of the substance/preparation

Surface treatment of wood and other materials

Use	
SU22	Professional uses: Public domain (administration, education, entertainment, services, craftsmen)
ERC8a	Wide dispersive indoor use of processing aids in open systems
ERC8c PROC11	Wide dispersive indoor use resulting in inclusion into or onto a matrix Non industrial spraying

Contributing exposure scenario controlling environmental exposure

Use

ERC8a	Wide dispersive indoor use of processing aids in open systems
ERC8c	Wide dispersive indoor use resulting in inclusion into or onto a matrix

Safety data sheet in accord	ance with regulat	ion (EC) No 190)7/2006			
Trade name: Hesse Special	hinner RSV 9994					
/ersion: 10/GB					Revision: 06.08.202	
Replaces Version: 9 / GB					Print date: 17.09.2	
Physical form	liquid					
Maximum amount u	-	-	250			
Emission days per si		<=	250			
Other relevant opera		ns				
Use: Room tempera Drying and through- Volatile organic subs Where possible recy Do not allow to enter Dispose of rinse wat	curing takes place tances will volatilis cling is preferred t soil, waterways o	se into the atmos o disposal or inc r waste water ca	spheric air ineration. nal.	inside.	nperatures.	
Waste water						
Do not discharge inte after mechanical pre		•			ers are to be conducted	
Exhaust air				,		
Keep container close	ed. Avoid release t	o the environme	nt.			
Soil						
Floors should be imp	ervious resistant	to liquids and ea	isv to clea	n		
Disposal recommen		-	by to olda			
EWC waste code		-		ents and solve	ent mixtures	
Where possible recy Do not allow to enter Where possible recy Do not allow to enter	drains or waterwa	o disposal or inc ays. o disposal or inc	ineration.			
modified product						
EWC waste code		070304 - c liquors	ther organ	nic solvents, v	washing liquids and mother	
Disposal recommen	dations for pac	kaging				
EWC waste code	•	150110 - p	150110 - packaging containing residues of or contaminated by dangerous substances			
Completely emptied Completely emptied						
Contributing exposu	ire scenario	controlling	<u>ı worke</u>	er exposi	<u>ıre (professional)</u>	
Short title of the exp	osure scenario	,				
Substance number:0	CES014					
Use SU22	Professional us services, crafts		in (admini	istration, educ	cation, entertainment,	
PROC11 Physical form	Non industrial s liquid	spraying				
Maximum amount u	sed per time or	activity				
Duration of exposure Frequency of exposu	•	<= <=	8 220	h/d d/a		
Other relevant opera		ns				



Version: 10 / GB

Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

Drying and through-curing takes place at ambient temperature or at higher temperatures. Volatile organic substances will volatilise into the atmospheric air inside. Read attached instructions before use.

Product substance and product safety related measures

Apply technical measures to comply with the occupational exposure limits. Where reasonably practicable this should be achieved by the use of local exhaust ventilation and good general extraction. Provide for sufficient ventilation. This can be achieved by local exhaust or general exhaust air collection. Wear a suitable respirator if the ventilation is not sufficient to keep the solvent vapour concentration below the occupational limit values.

Respiratory protection

Avoid inhalation of vapour and spray mist. Use breathing apparatus if exposed to vapours/dust/aerosol. Recommended Filter type: Respiratory protection mask with combination filter A/P2

Hand protection

Protective gloves complying with EN 374.

Glove material			
Appropriate Material	butyl-rubber		
Material thickness	>=	0,7	
Breakthrough time	>=	30	
		-	

This recommendation is valid only for the product named in this safety data sheet supplied by us, and only for the indicated intended use purposes.

For special purposes, it is recommended to check the resistance to chemicals of the protective gloves mentioned above together with the supplier of these gloves.

The instructions and information provided by the glove manufacturer on use, storage, maintenance and replacement must be followed.

The breakthrough time must be greater than the end use time of the product.

Gloves should be replaced regularly and if there is any sign of damage to the glove material.

The performance or effectiveness of the glove may be reduced by physical/ chemical damage and poor maintenance.

Eye protection

Wear eye glasses with side protection according to EN 166.

Body protection

Wear suitable protective clothing. Remove contaminated clothing and wash it before reuse. Wash hands before breaks and after work.

Exposure estimation and reference to its source

Workers (professional)

SU PROC Assessment method Exposure assessment Exposure assessment (method) Risk characterisation ratio (RCR) Lead substance SU22 PROC11 Long-term inhalative 242 mg/m³ ECETOC TRA 0,504 n-butyl acetate

Information on estimated exposure and downstream-user guidance

Guidance for Downstream Users

The downstream user can evaluate whether he operates within the conditions set in the exposure scenario on the basis of the information supplied. This evaluation can be conducted by an expert or



Trade name: Hesse Special thinner RSV 9994 Version: 10 / GB Replaces Version: 9 / GB

Revision: 06.08.2020 Print date: 17.09.20

using the risk assessment tools recommended by ECHA.